

## DS-2DF8225IX-AELW(T5) 2 MP 25× Network IR Speed Dome

DarkFighter



Hikvision DS-2DF8225IX-AELW(T5) 2MP 25× Network IR Speed Dome adopts 1/1.8" progressive scan CMOS chip. With the 25× optical zoom lens, the camera offers more details over expansive areas.

This series of cameras can be widely used for wide ranges of high-definition, such as the rivers, forests, roads, railways, airports, ports, squares, parks, scenic spots, stations and large venues, etc.

- 1/1.8" Progressive Scan CMOS
- High quality imaging with 2 MP resolution
- Excellent low-light performance with DarkFighter technology
- 25× optical zoom and 16× digital zoom provide close up views over expansive areas
- Expansive night view with up to 400 m IR distance
- Water and dust resistant (IP67)
- Supports face capture to detect, capture, grade, and select faces in motion
- Supports road traffic to detect vehicles



## ▪ DORI

The DORI (detect, observe, recognize, identify) distance gives the general idea of the camera ability to distinguish persons or objects within its field of view.

It is calculated based on the camera sensor specification and the criteria given by EN 62676-4: 2015.

| DORI            | Detect               | Observe             | Recognize           | Identify           |
|-----------------|----------------------|---------------------|---------------------|--------------------|
| Definition      | 25 px/m              | 63 px/m             | 125 px/m            | 250 px/m           |
| Distance (Tele) | 2034.5 m (6674.9 ft) | 807.3 m (2648.6 ft) | 406.9 m (1335.0 ft) | 203.4 m (667.3 ft) |

## ▪ Specification

| Camera                 |                                                                                                                                                               |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor           | 1/1.8" progressive scan CMOS                                                                                                                                  |
| Min. Illumination      | Color: 0.002 Lux @ (F1.5, AGC ON), B/W: 0.0002 Lux @ ((F1.5, AGC ON), 0 Lux with IR                                                                           |
| Shutter Speed          | 1/1 s to 1/30,000 s                                                                                                                                           |
| Day & Night            | IR cut filter                                                                                                                                                 |
| Zoom                   | 25x optical, 16x digital                                                                                                                                      |
| Max. Resolution        | 1920 × 1080                                                                                                                                                   |
| Lens                   |                                                                                                                                                               |
| Focus                  | Auto, semi-auto, manual, rapid focus                                                                                                                          |
| Focal Length           | 5.9 mm to 147.5 mm                                                                                                                                            |
| Zoom Speed             | Approx. 4.8 s (optical, wide-tele)                                                                                                                            |
| FOV                    | Horizontal field of view: 59.8° to 3.3° (wide-tele),<br>Vertical field of view: 33.7° to 1.9° (wide-tele),<br>Diagonal field of view: 65° to 3.8° (wide-tele) |
| Aperture               | Max. F1.5                                                                                                                                                     |
| Illuminator            |                                                                                                                                                               |
| Supplement Light Type  | IR                                                                                                                                                            |
| Supplement Light Range | Up to 400 m                                                                                                                                                   |
| Smart Supplement Light | Yes                                                                                                                                                           |
| PTZ                    |                                                                                                                                                               |
| Movement Range (Pan)   | 360°                                                                                                                                                          |
| Movement Range (Tilt)  | -20° to 90° (auto flip)                                                                                                                                       |
| Pan Speed              | Pan speed: configurable from 0.1° to 210°/s; preset speed: 280°/s                                                                                             |
| Tilt Speed             | Tilt speed: configurable from 0.1° to 150°/s, preset speed 250°/s                                                                                             |
| Proportional Pan       | Yes                                                                                                                                                           |
| Presets                | 300                                                                                                                                                           |
| Patrol Scan            | 8 patrols, up to 32 presets for each patrol                                                                                                                   |
| Pattern Scan           | 4 pattern scans, record time over 10 minutes for each scan                                                                                                    |
| Power-off Memory       | Yes                                                                                                                                                           |
| Park Action            | Preset, pattern scan, patrol scan, auto scan, tilt scan, random scan, frame scan, panorama scan                                                               |
| 3D Positioning         | Yes                                                                                                                                                           |
| PTZ Status Display     | Yes                                                                                                                                                           |
| Preset Freezing        | Yes                                                                                                                                                           |

|                             |                                                                                                                                                                                                                                                                                                              |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Scheduled Task              | Preset, pattern scan, patrol scan, auto scan, tilt scan, random scan, frame scan, panorama scan, dome reboot, dome adjust, aux output                                                                                                                                                                        |
| <b>Video</b>                |                                                                                                                                                                                                                                                                                                              |
| Main Stream                 | 50 Hz: 25 fps ( 1920 × 1080, 1280 × 960, 1280 × 720)<br>60 Hz: 30 fps (1920 × 1080, 1280 × 960, 1280 × 720)                                                                                                                                                                                                  |
| Sub-Stream                  | 50 Hz: 25 fps (704 × 576, 640 × 480, 352 × 288)<br>60 Hz: 30 fps (704 × 480, 640 × 480, 352 × 240)                                                                                                                                                                                                           |
| Third Stream                | 50 Hz: 25 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 576, 640 × 480, 352 × 288)<br>60 Hz: 30 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 640 × 480, 352 × 240)                                                                                                                                 |
| Video Compression           | Main stream: H.265+/H.265/H.264+/H.264<br>Sub-stream: H.265/H.264/MJPEG<br>Third stream: H.265/H.264/MJPEG                                                                                                                                                                                                   |
| H.264 Type                  | Baseline Profile/Main Profile/High Profile                                                                                                                                                                                                                                                                   |
| H.265 Type                  | Main profile                                                                                                                                                                                                                                                                                                 |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding                                                                                                                                                                                                                                                                                     |
| Region of Interest (ROI)    | 8 fixed regions for each stream                                                                                                                                                                                                                                                                              |
| <b>Audio</b>                |                                                                                                                                                                                                                                                                                                              |
| Audio Compression           | G.711alaw, G.711ulaw, G.722.1, G.726, MP2L2, PCM                                                                                                                                                                                                                                                             |
| Audio Bit Rate              | 64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32~192 Kbps (MP2L2)                                                                                                                                                                                                                                        |
| <b>Network</b>              |                                                                                                                                                                                                                                                                                                              |
| Protocols                   | IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, DHCP, PPPoE, UDP, IGMP, ICMP, Bonjour                                                                                                                                                                   |
| API                         | ISUP, ISAPI, Hikvision SDK, Open Network Video Interface (Profile S, Profile G, Profile T)                                                                                                                                                                                                                   |
| Simultaneous Live View      | Up to 20 channels                                                                                                                                                                                                                                                                                            |
| User/Host                   | Up to 32 users. 3 levels: Administrator, Operator and User                                                                                                                                                                                                                                                   |
| Security                    | Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.3, host authentication (MAC address) |
| Client                      | HikCentral, iVMS-4200, Hik-Connect                                                                                                                                                                                                                                                                           |
| Web Browser                 | IE11, Chrome 57.0+, Firefox 52.0+, Safari 11+                                                                                                                                                                                                                                                                |
| <b>Image</b>                |                                                                                                                                                                                                                                                                                                              |
| Image Settings              | Saturation, brightness, contrast, sharpness, gain, and white balance adjustable by client software or web browser                                                                                                                                                                                            |
| Image Enhancement           | BLC, HLC, 3D DNR                                                                                                                                                                                                                                                                                             |
| Wide Dynamic Range (WDR)    | 140 dB WDR                                                                                                                                                                                                                                                                                                   |
| Image Stabilization         | Yes. Built-in gyroscope to improve EIS performance.                                                                                                                                                                                                                                                          |
| Regional Exposure           | Yes                                                                                                                                                                                                                                                                                                          |
| Regional Focus              | Yes                                                                                                                                                                                                                                                                                                          |
| Privacy Mask                | Up to 24 masks, polygon region, mosaic mask, mask color configurable                                                                                                                                                                                                                                         |
| <b>Interface</b>            |                                                                                                                                                                                                                                                                                                              |
| Ethernet Interface          | 1 RJ45 10M/100M self-adaptive Ethernet port; Hi-PoE                                                                                                                                                                                                                                                          |
| On-board Storage            | Built-in memory card slot, support MicroSD/MicroSDHC/MicroSDXC, up to 256 GB                                                                                                                                                                                                                                 |
| Alarm                       | 7 inputs, 2 outputs                                                                                                                                                                                                                                                                                          |


|                                           |                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio                                     | 1 input (line in), max. input amplitude: 2-2.4 vpp, input impedance: 1 K $\Omega$ $\pm$ 10%; 1 output (line out), line level, output impedance: 600 $\Omega$                                                                                                                                                                                          |
| Video Output                              | 1.0V[p-p]/75 $\Omega$ , PAL, NTSC, BNC connector                                                                                                                                                                                                                                                                                                      |
| RS-485                                    | HIKVISION, Pelco-P, Pelco-D, self-adaptive                                                                                                                                                                                                                                                                                                            |
| <b>Event</b>                              |                                                                                                                                                                                                                                                                                                                                                       |
| Basic Event                               | Motion detection, video tampering alarm, alarm input and output                                                                                                                                                                                                                                                                                       |
| Smart Event                               | Line crossing detection, region entrance detection, parking detection, unattended baggage detection, object removal detection, intrusion detection, region exiting detection, vandal-proof alarm, audio exception detection                                                                                                                           |
| Smart Tracking                            | Manual tracking, auto-tracking                                                                                                                                                                                                                                                                                                                        |
| Alarm Linkage                             | Alarm actions, such as Preset, Patrol Scan, Pattern Scan, Memory Card Video Record, Trigger Recording, Notify Surveillance Center, Upload to FTP/Memory Card/NAS, Send Email, etc.                                                                                                                                                                    |
| <b>Deep Learning Function</b>             |                                                                                                                                                                                                                                                                                                                                                       |
| Face Capture                              | Detects up to 30 faces simultaneously. Supports detecting, tracking, capturing, grading, selecting of face in motion, and output the best face picture of the face                                                                                                                                                                                    |
| Perimeter Protection                      | Line crossing, intrusion, region entrance, region exiting<br>Support alarm triggering by specified target types (human and vehicle)                                                                                                                                                                                                                   |
| <b>Road Traffic and Vehicle Detection</b> |                                                                                                                                                                                                                                                                                                                                                       |
| Road Traffic                              | Support vehicle detection (license plate number, vehicle model, and vehicle color recognition)                                                                                                                                                                                                                                                        |
| <b>General</b>                            |                                                                                                                                                                                                                                                                                                                                                       |
| General Function                          | Mirror, password protection, watermark, IP address filter                                                                                                                                                                                                                                                                                             |
| Power                                     | 24 VAC (Max. 60 W, including max. 18 W for IR and max. 6 W for heater), Hi-PoE (Max. 50 W, including max. 18 W for IR and max. 6 W for heater)                                                                                                                                                                                                        |
| Operating Condition                       | Temperature: -40°C to 70°C (-40°F to 158°F), Humidity: $\leq$ 95%                                                                                                                                                                                                                                                                                     |
| Wiper                                     | Yes                                                                                                                                                                                                                                                                                                                                                   |
| Dimension                                 | $\varnothing$ 266.6 mm $\times$ 410 mm ( $\varnothing$ 10.50" $\times$ 16.14")                                                                                                                                                                                                                                                                        |
| Weight                                    | Approx. 8 kg (17.64 lb.)                                                                                                                                                                                                                                                                                                                              |
| Language                                  | 33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian |
| <b>Approval</b>                           |                                                                                                                                                                                                                                                                                                                                                       |
| EMC                                       | FCC SDoC (47 CFR Part 15, Subpart B);<br>CE-EMC (EN 55032: 2015, EN 61000-3-2: 2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4: 2011 +A1: 2014);<br>RCM (AS/NZS CISPR 32: 2015);<br>IC VoC (ICES-003: Issue 7);<br>KC (KN 32: 2015, KN 35: 2015)                                                                                                         |
| Safety                                    | UL (UL 62368-1)<br>CB (IEC 62368-1:2014+A11);<br>CE-LVD (EN 62368-1:2014+A11:2017),<br>BIS (IS 13252(Part 1):2010/ IEC 60950-1: 2005);<br>LOA (IEC/EN 60950-1)                                                                                                                                                                                        |

|             |                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Environment | CE-RoHS (2011/65/EU); WEEE (2012/19/EU);<br>Reach (Regulation (EC) No 1907/2006)                                                    |
| Protection  | IP67 (IEC 60529-2013), Lightning Protection, Surge Protection and Voltage Transient Protection, ±6kV Line to Gnd, ±3kV Line to Line |

▪ **Available Model**



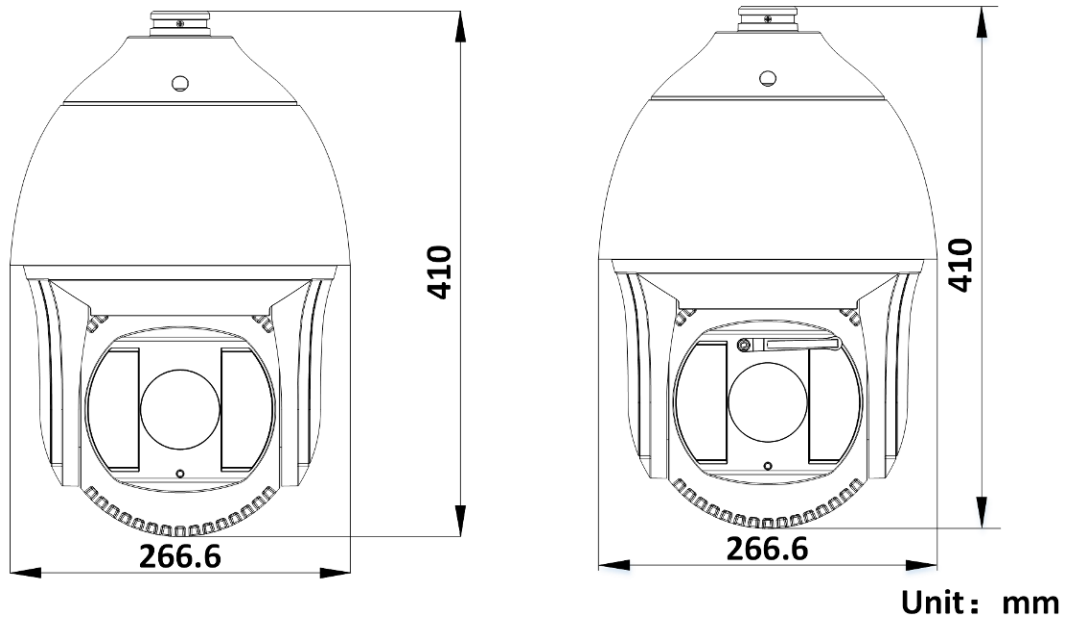


DS-2DF8225IX-AELW (T5)

▪ **Dimension**



▪ **Accessory**

▪ **Optional**

| DS-1604ZJ-BOX-<br>POLE                                                              | DS-1662ZJ                                                                           | DS-1663ZJ                                                                           | DS-1604ZJ-corner                                                                      | DS-1604ZJ-BOX-<br>CORNER                                                              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |



Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com