



Datenblatt - Fiche technique - Data sheet




26.99.0360



VALUE Kat.6a 19"-Patchpanel, 24 P, geschirmt, schwarz

VALUE Panneau de brassage Cat.6a 19", 24 ports, STP, noir

VALUE Cat.6a 19" Patch Panel, 24 Ports, STP, black

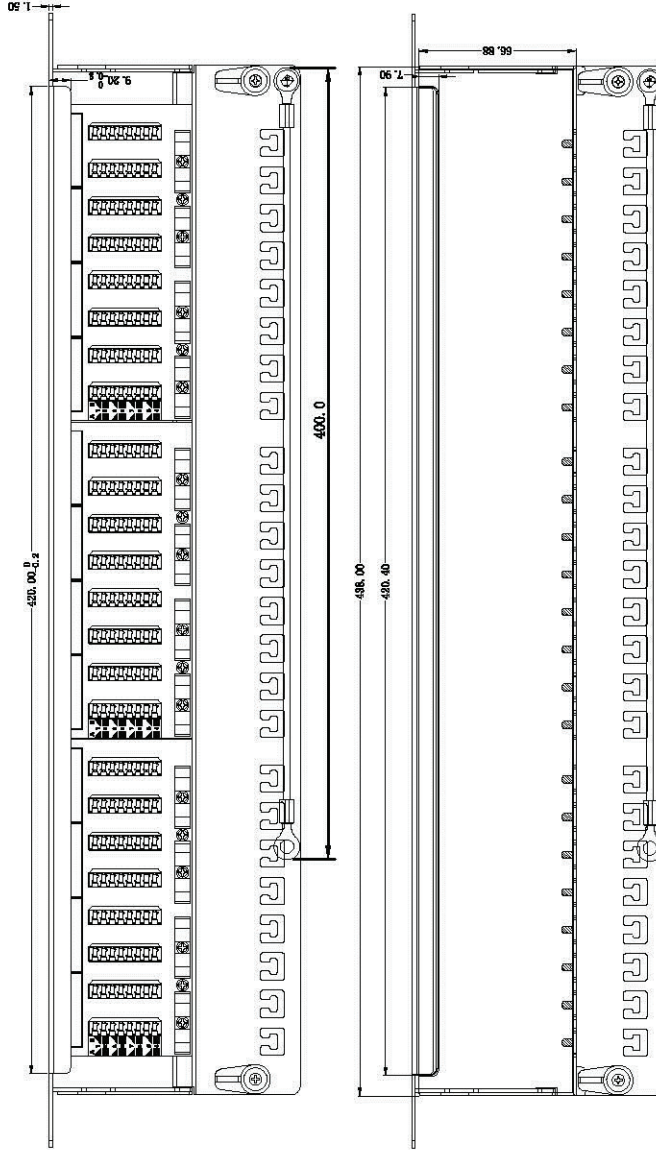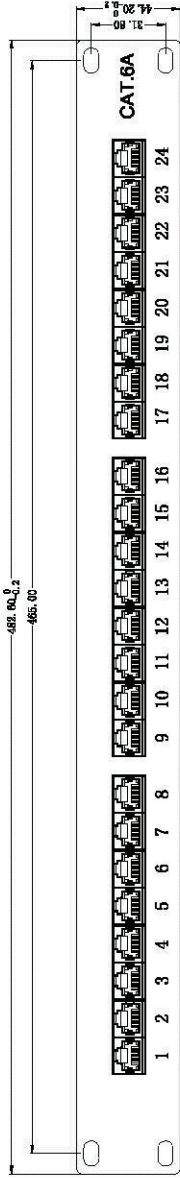

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125V AC RMS
- 2. CURRENT RATING : 1.5A mp
- 3. CONTACT RESISTANCE : 100 MILLI OHMS MAX
- 4. INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
- 5. DIELECTRIC STRENGTH : 750V AC RMS 60Hz, 1MIN
- 6. CAT. 6a PERMANENT LINK : ANSI/TIA/EIA-568 B.2-1 ISO/IEC 11801:2002 CLASS Ea

ENVIRONMENTAL:

- 1. STORAGE : -40° TO+85°
- 2. OPERATION : 0° TO+70°
- RJ45 JACK COMPLY TO REQUIREMENTS OF IEC-60603-7-5 MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68 MECHANICAL

- 1. SHIELD MATERIAL BRASS C2680 T=0.25MM
- 2. HOUSING MATERIAL PBT+15%GF UL94V0
- 3. CONTACT MATERIAL PHOSHOR BRONZE PLATING GOLD
- 4. PANEL FRAME ZN PLATING
- 5. IDC MATERIAL: PC UL94V0 TERMINAL:PHOSPHOR BRONZE, TIN PLATING
- 6. RJ45 JACK LIFE: 750 TIMES MIN
- 7. IDN LIFE : 200 TIMES MIN
- 8. RETENTIVENESS OF INSERTION STRUCTURE: 50N 60±5s

Accessory:

- 1. Cable Tie(75×3.0mm) ×24Pcs
- 2. Instruction Sheet
- 3. Screw and Nut M6*18mm x 4set

MATERIAL LIST:

⑦	Bottom Panel	1.5mm thickness Metallic Panel with plastic powder cladding	1	
⑥	Upper Panel Cover	1.0mm thickness Metallic Panel with plastic powder cladding	1	
⑤	RJ45 Jack	Housing-Fireproof PBT UL-94V0 Pin-8P8C 3u" gold plated	24	
④	PCB	1.6mm UL-94V0	3	
③	IDC Body	Fireproof PC/ABS UL-94V0/With Colour Coded Printing T568A/B	24	
②	IDC Pin	Phosphor Bronze & Tinned	192	
①	IDC Terminal	For 22-24 AWG Cable	24	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
			2013-10-23	

ITEM NO.	Colour
26.99.0360	Black RAL 9005
26.99.0361	Gray RAL 7035

rotronic			
ITEM NO.	26.99.0360 / 26.99.0361	UNIT	MM
DESC.	VALUE Cat.6A Patch Panel, STP, 1U, 24 ports		
DRAWNBY	CHECKBY	APPROBY	DATE
CHEWUAN	CHEWUAN		2013-10-23

BY	CHK	DATE	REV.
		2013-10-23	A