
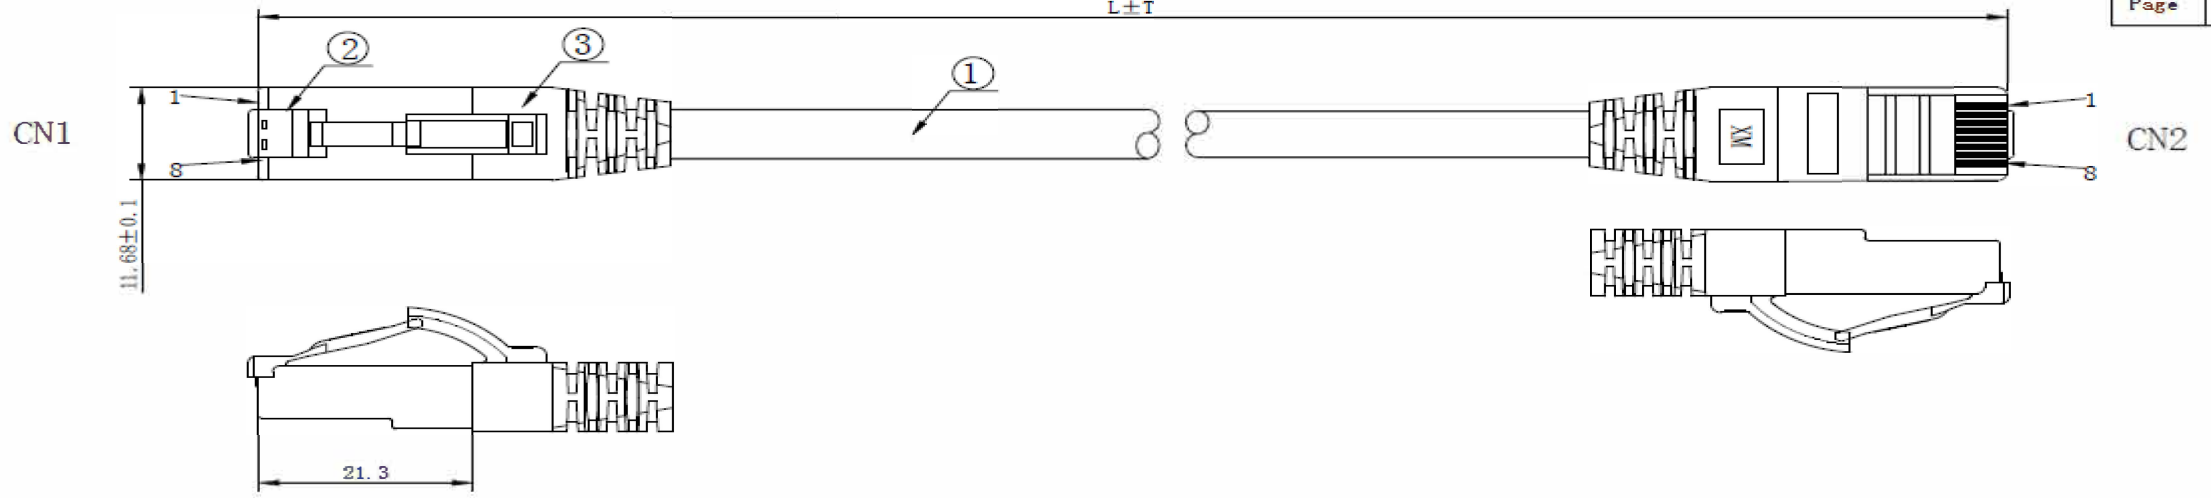


WIRING DIAGRAM

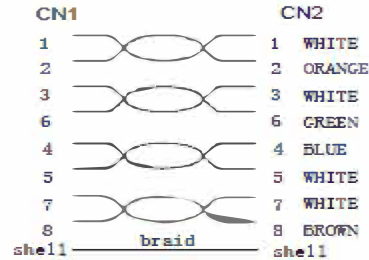

NOTE:

1. ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
2. FLUKE Channel LINK TEST:
TEST LIMIT:ISO11801 Channel Class EA
3. Operating temperature:-20℃~+75℃
4. RoHS2.0 AND REACH compliant
5. Spray WORD:CAT6A S/FTP 4x2x27AWG/7 TPE ISO11801 & EN50173 & ANSI/TIA568C.2
6. TPE:Non fire retardant(Conform IEC60754-2)

MATERIAL LIST:

③	OVER MOLD	PVC 75A	2	
②	PLUG	RJ45 8PSC SHIELDED PIN GOLD PLATED 3U", THE SHELL PLATED NICKEL, COLOUR: TRANSPARENT Yellow	2	
①	CABLE	S/FTP CAT. 6A (27AWG BC*1P+AL-FOIL)*4PAIR+Braid (AL-MG) JACKET: TPE/HALOGEN FREE, OD: 5.8±0.2MM	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK



					CUSTOMER		ITEM NO.		
					PRODUCT NAME			UNIT	MM
		NEW	2020-08-21	A	DRAWNBY	CHECKBY	APPROVE	DATE	
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	Arvin	Alvan		2020-08-21	