



S SD9362-EH/EHL series Speed Dome Network Camera




H.265 · 1080P Full HD · 30x Zoom · WDR Pro · Smart Stream II · NEMA 4X · IP68 · IK10 · -40°C ~ 55°C · EIS · Defog · 60W UPoE · GbE Ethernet

VIVOTEK's SD9362-EH/EHL is a high performance H.265 Full HD speed dome network camera. Armed with a 30x optical zoom lens, the camera is able to capture fine details at top-notch quality. By combining both H.265 and VIVOTEK's Smart Stream II technology which enables the camera to optimize quality for desired regions and therefore to maximize efficiency of bandwidth usage, it is capable of reducing both bandwidth and storage consumption by up to 80%* while maintaining the highest standard of image quality.

Offering extra smooth video quality with resolutions of up to 60 fps at 1920x1080, the SD9362-EH/EHL is also equipped with WDR Pro technology and IR-cut filter for seamless day/night operation. This enables the camera to cope effortlessly with the challenging lighting conditions faced in 24/7 surveillance. Further, the water-proof IP68-rated, vandal-proof IK10-rated and NEMA 4X-rated housing of the SD9362-EH/EHL protects the camera body against rain, dust and corrosion and provides a wide operating-temperature range of between -40°C and 55°C. This combination of robustness and high performance ensures that the SD9362-EH/EHL is especially suitable for monitoring wide, open, harsh indoor or outdoor spaces such as airports, highways and parking lots where high-level reliability and precision are called for.

* Depending on scene being monitored

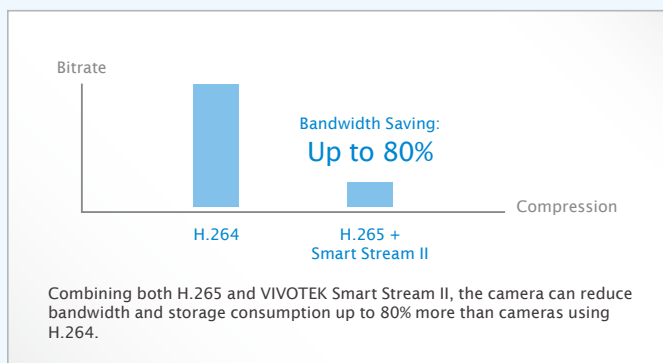


Key Features

- H.265 Compression Technology
- 1080P Full HD CMOS Sensor
- 60 fps @ 1920x1080
- 30x Optical Zoom
- Removable IR-cut Filter for Day & Night Function
- 360° Continuous Pan and 110° Tilt
- WDR Pro for Unparalleled Visibility in High Contrast Environments
- Smart Stream II to Optimize Bandwidth Efficiency
- Weather-proof IP68-rated, Vandal-proof IK10-rated and NEMA4X Housing
- -40°C ~ 55°C Wide Temperature Range for Extreme Weather Conditions
- Audio Detection for Instant Alerts
- Auto Tracking for Moving Objects
- Built-in SD/SDHC/SDXC Card Slot for On-board Storage
- Defog
- EIS



Airport



Port



City Surveillance




Extreme Weather

Technical Specifications

| | |
|-------------------------------|--|
| Model | SD9362-EH SD9362-EHL |
| System Information | |
| CPU | Multimedia SoC (System-on-Chip) |
| Flash | 128MB |
| RAM | 512MB |
| Camera Features | |
| Image Sensor | SD9362-EH: 1/2.8" Progressive CMOS SD9362-EHL: 1/3" Progressive CMOS |
| Maximum Resolution | 1920x1080 (2MP) |
| Lens Type | 30x Optical Zoom, Auto Focus |
| Focal Length | f= 4.3 ~ 129 mm |
| Aperture | F1.6 ~ F4.7 |
| Auto-iris | DC-iris |
| Field of View | SD9362-EH: 2° ~ 64° (Horizontal) 1° ~ 39° (Vertical) 3° ~ 71° (Diagonal) SD9362-EHL: 2° ~ 59° (Horizontal) 2° ~ 45° (Vertical) 3° ~ 71° (Diagonal) |
| Shutter Time | SD9362-EH: 1 sec. to 1/10,000 sec. SD9362-EHL: 1/8 sec. to 1/30,000 sec. |
| WDR Technology | WDR Pro |
| Day/Night | Removable IR-cut filter for day & night function |
| Minimum Illumination | SD9362-EH: 0.53 Lux @ F1.6 (Color) 0.01 Lux @ F1.6 (B/W) SD9362-EHL: 0.42 Lux @ F1.6 (Color) 0.01 Lux @ F1.6 (B/W) |
| Pan Speed | 0.05° ~ 450°/sec. |
| Pan Range | 360° endless |
| Tilt Speed | 0.05° ~ 450°/sec. |
| Tilt Range | 110° |
| Preset Locations | 256 preset locations, 128 presets per tour |
| Pan/Tilt/Zoom Functionalities | SD9362-EH: 48x digital zoom (4x on IE plug-in, 12x built-in) Auto pan mode Auto patrol mode SD9362-EHL: 128x digital zoom (4x on IE plug-in, 32x built-in) Auto pan mode Auto patrol mode |
| On-board Storage | Slot type: SD/SDHC/SDXC card slot Seamless Recording |
| Video | |
| Compression | H.265, H.264, MJPEG |
| Maximum Frame Rate | H.265 & H.264: 60 fps @ 1920x1080 MJPEG: 30 fps @ 1920x1080 |
| Maximum Streams | 4 simultaneous streams |
| S/N Ratio | SD9362-EH: 63 dB SD9362-EHL: 53 dB |
| Dynamic Range | SD9362-EH: 100 dB* SD9362-EHL: 100 dB *130 dB (New Firmware Version) |
| Video Streaming | Adjustable resolution, quality and constant bit rate control; Smart Stream II |
| Image Settings | Time stamp, text overlay, flip & mirror; Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks (up to 24); Scheduled profile settings, EIS, 3DNR, defog |
| Audio | |
| Audio Capability | Two-way Audio (Full duplex) |
| Compression | G.711, G.726 |
| Interface | External microphone input External line output |
| Network | |

| | |
|-----------------------------|--|
| Users | Live viewing for up to 10 clients |
| Protocols | IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, NTCIP, ICMP, ARP, SSL, TLS |
| Interface | 10 Base-T/100 BaseTX/1000 BaseTX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard. |
| ONVIF | Supported, specification available at www.onvif.org |
| Intelligent Video | |
| Video Motion Detection | Five-window video motion detection |
| Auto-Tracking | Auto-tracking on moving object |
| Alarm and Event | |
| Alarm Triggers | Motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, audio detection |
| Alarm Events | Event notification using digital output, HTTP, SMTP, FTP, NAS server and SD Card File upload via HTTP, SMTP, FTP, NAS server and SD card |
| General | |
| Connectors | RJ-45 cable connector for Network/PoE connection Audio input Audio output 24VDC / 24VAC power input Digital input*4 Digital output*2 RS-485 |
| LED Indicator | System power and status indicator |
| Power Input | 24VDC 24VAC 60W UPoE |
| Power Consumption | Max. 48/26 W (Heater on/off) |
| Dimensions | Ø 162 x 221 mm |
| Weight | 2.95 kg |
| Casing | Weather-proof IP68-rated, Vandal-proof IK10-rated, and NEMA 4X-rated mated housing |
| Safety Certifications | CE, FCC Class A, VCCI, C-tick, UL, NEMA 4X |
| Operating Temperature | -40°C ~ 55°C (-40°F ~ 131°C) |
| Humidity | 90% |
| Warranty | 36 months |
| System Requirements | |
| Operating System | Microsoft Windows 8/7/Vista/XP/2000 |
| Web Browser | Mozilla Firefox 7~43 (streaming only) Internet Explorer 7/8/9/10/11 |
| Other Players | VLC: 1.1.11 or above Quicktime: 7 or above |
| Included Accessories | |
| CD | User's manual, quick installation guide, Installation Wizard 2, VAST |
| Others | Wall mount bracket, screws, waterproof connectors, quick installation guide, alignment sticker, L-wrench, software CD, desiccant bags, I/O combo cable |

Dimensions

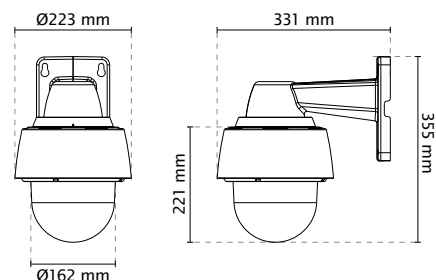

Compatible Accessories

Mounting Kits



AM-529
Mounting Adapter

Others



IPD-USB
USB Joystick

Cabinet



AT-CAS-001
Cabinet for Speed dome,
IP66, IK10



AT-CAB-002
Cabinet for HLG
Power Supply



AT-SUN-002
Sunshield



AT-SWH-000
Power Safety Kit



PoE Kit/Power Adapter

24VDC



AW-IHS-0200/0201/0203
Industrial Fiber Media Converter



HLG-80H-24
Industrial 24VDC/80W Power Supply, IP67



HLG-80H-24
Industrial 24VDC/80W Power Supply, IP67

24VAC



AA-341
AC 24V 3.5A Power Adapter

60W UPoE



AW-IHU-0100
Industrial 1xGE 60W UPoE
Injector



HLG-120H-54
Industrial 54VDC/120W
Power Supply, IP67



AW-IHU-0200
Industrial 1xGE 60W UPoE
+ 1x SFP GE Switch



HLG-120H-54
Industrial 54VDC/120W
Power Supply, IP67



AW-IHU-0600
Industrial 4xGE 60W UPoE
+ 2xGE SFP Switch



HLG-240H-54
Industrial 54VDC/240W
Power Supply, IP67



AP-GIC-010A-060
1xGE 60W UPoE Injector